
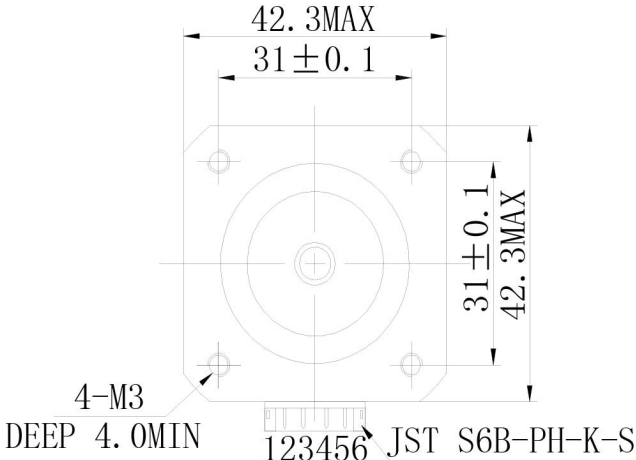
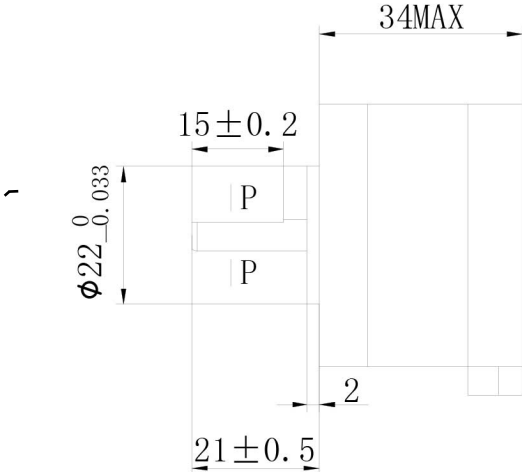

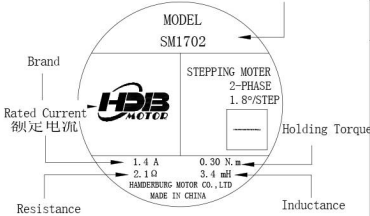



	1	2	3	4	5	6
A						
B	 					
图纸编码	Phase	2	Lifetime (Hours)	Above 5000H		
	Step Angle	1.8°	Temperature Rise	Below 80K		
	Step Angle Error (No Load)	±0.09° or below	Insulation Withstand Voltage	500V A.C		
物料代码	Current	1.4 A	Insulation Resistance	Above 100 MΩ		
	Resistance (Phase)	2.1 Ω±10%	Insulation Class	B		
	Inductance (Phase)	3.4 mH±20%	Operating Temperature Range	-20°C~+50°C		
版本 Rev	Holding Torque	0.30 N.m	Operating Humidity Range	15%RH~90%RH		
	Radial Runout	0.025 MM (Load 450g)	Storage Temperature Range	-20°C~+70°C		
A1.0	Axial Runout	0.075 MM (Load 920g)	Storage Humidity Range	15%RH~95%RH		
	Rated Operating Status	Continuous	Weight	0.24 kg		
变更内容 Revision Record	Wire Color and Connection Diagram of the Motor		Excitation Sequence (2-Phase Excitation)			
初次发放			Label Content			
签字The signature	Note: The color and order of the motor leads are subject to the actual object.					
日期 Date	2023.03.06					
	1	2	3	4	5	6



客户签字确认							视图方式:	SM1702 TWO-PHASE HYBRID STEPPER MOTOR	
标记	处数	更改文件号	签名	年月日					
设计			标准化				比例		
校核			工艺						
审核			批准						
图样标记	H						共 1 张 第 1 张	 汉德保电机 WWW.HDBMOTORS.COM	