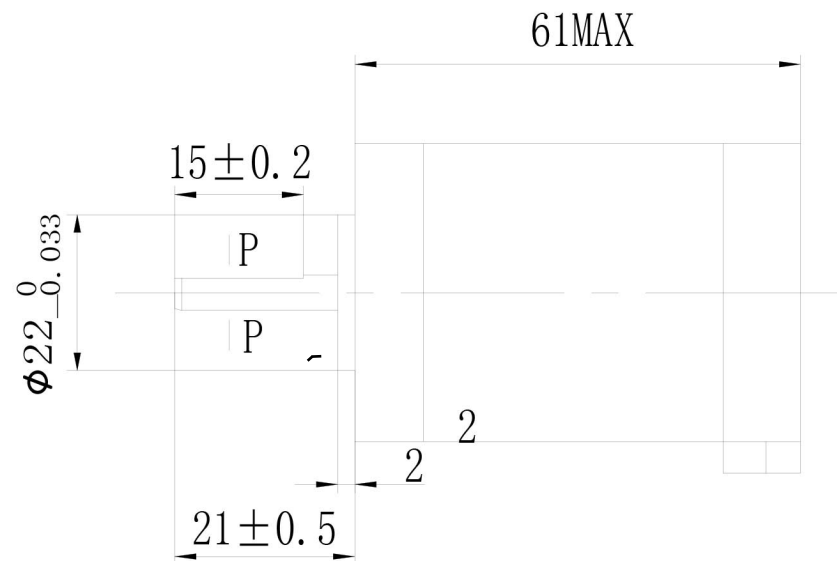


Phase	2	Temperature Rise	Below 80K
Step Angle	1.8°	Insulation Withstand Voltage	500V A.C
Step Angle Error (No Load)	±0.09 or below	Insulation Resistance	Above 100 MΩ
Rated Voltage	3.6 V	Insulation Class	B
Rated Current	2.0 A	Operating Temperature Range	-20°C~+50°C
Resistance (Phase)	1.9 Ω±10%	Operating Humidity Range	20%RH~90%RH
Inductance (Phase)	3.5 mH±20%	Storage Temperature Range	-20°C~+70°C
Holding Torque	0.72 N.m	Storage Humidity Range	15%RH~95%RH
Weight	0.6kg		
Rated Operating Status	Continuous		
Lifetime (Hours)	Above 5000H		

变更内容

Revision Record

初次发放

签字The signature

日期 Date

2023. 10. 23

Wire Color and Connection Diagram of the Motor




Note: The color and order of the motor leads are subject to the actual object.

Excitation Sequence (2-Phase Excitation)

Step	A	B	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

Initial Direction: Follow the excitation sequence in the table, observing the clockwise direction from the mounting surface.

Label Content



客户签字确认						视图方式:			
标记		处数		更改文件号		签名		年 月 日	
设计				标准化					
校核				工艺					
审核				批准					
图样标记		H				共 1 张		第 1 张	



HB
HDB MOTORS

SM1705

TWO-PHASE HYBRID
STEPPER MOTOR



汉德保电机

WWW.HDBMOTORS.COM