


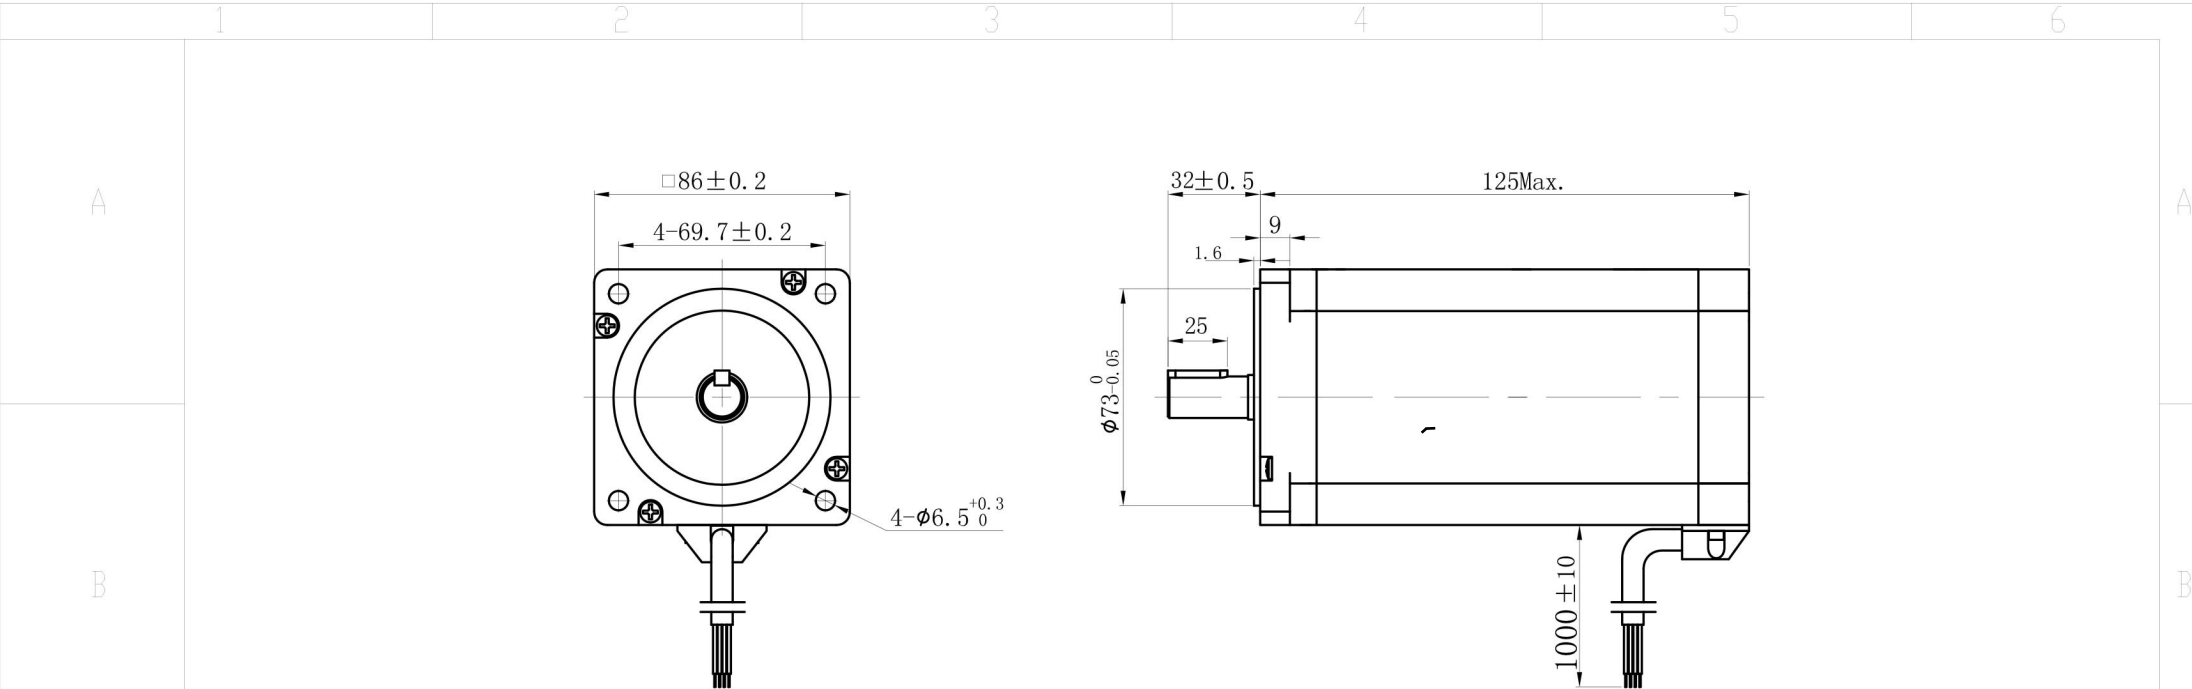

图纸编码	Phase	3	Temperature Rise	Below 80K
	Step Angle	1.2°	Insulation Withstand Voltage	500V A.C
物料代码	Step Angle Error (No Load)	±0.06° or below	Insulation Resistance	Above 100 MΩ
	Voltage	6.0 V	Insulation Class	B
453	Current	5.8 A	Operating Temperature Range	-20°C~+50°C
	Resistance (Phase)	2.2 Ω±10%	Operating Humidity Range	20%RH~90%RH
版本 Rev	Inductance (Phase)	8.0 mH±20%	Storage Temperature Range	-20°C~+70°C
	Holding Torque	6.0 N.m	Storage Humidity Range	15%RH~95%RH
A1.0	Rated Operating Status	Continuous	Lifetime (Hours)	Above 5000H

变更内容
Revision Record

初次发放

签字The signature

日期 Date
2023.10.21


Note: The yellow-green line is the ground wire.

Excitation Sequence (3-Phase Excitation)

STEP	U	V	W
1	+	-	-
2	-	-	+
3	-	+	+
4	+	+	-
5	+	-	-
6	-	-	+

Initial Direction: Follow the excitation sequence in the table, observing the clockwise direction from the mounting surface.

Label Content



客户签字确认					视图方式:		SMC3403 THREE-PHASE HYBRID STEPPING MOTOR
标记	处数	更改文件号	签名	年月日		比例	
设计		标准化					 汉德保电机 WWW.HDBMOTORS.COM
校核		工艺					
审核		批准					
图样标记	H				共 1 张	第 1 张	