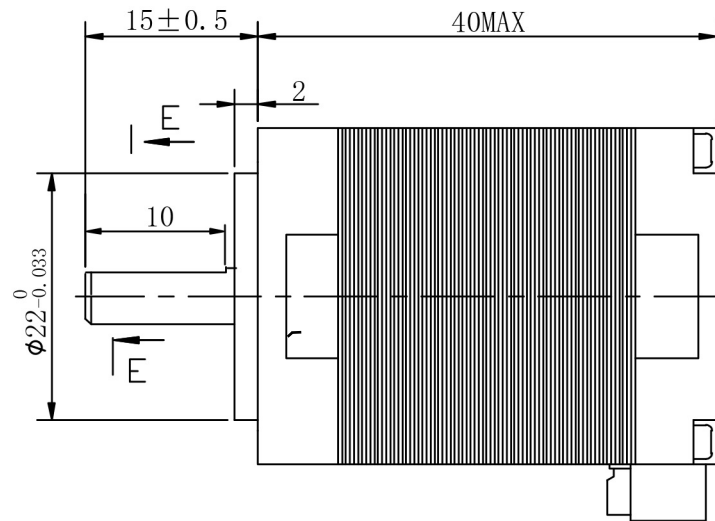
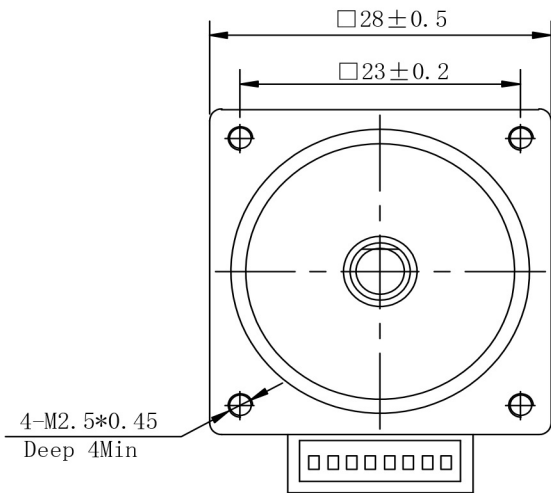




图纸编码	Phase	2	Lifetime (Hours)	Above 5000H
	Step Angle	1.8°	Temperature Rise	Below 80K
	Step Angle Error (No Load)	±0.09° or below	Insulation Withstand Voltage	500V A.C
	Current	1.3A	Insulation Resistance	Above 100 MΩ
物料代码	Resistance (Phase)	1.7Ω±10%	Insulation Class	B
	Inductance (Phase)	1.2 mH±20%	Operating Temperature Range	-20° C~+50° C
	Holding Torque	0.105N.m	Operating Humidity Range	20%RH~90%RH
	Radial Runout	0.025 MM (Load 450g)	Storage Temperature Range	-20° C~+70° C
版本 Rev	Axial Runout	0.075 MM (Load 450g)	Storage Humidity Range	15%RH~95%RH
	Rated Operating Status	Continuous	Weight	0.15KG

变更内容	Wire Color and Connection Diagram of the Motor 	Excitation Sequence (2-Phase Excitation) <table><tr><td>CW</td><td>Step</td><td>A</td><td>B</td><td>A~</td><td>B~</td><td></td></tr><tr><td></td><td>1</td><td>+</td><td>+</td><td>-</td><td>-</td><td></td></tr><tr><td></td><td>2</td><td>-</td><td>+</td><td>+</td><td>-</td><td></td></tr><tr><td></td><td>3</td><td>-</td><td>-</td><td>+</td><td>+</td><td></td></tr><tr><td></td><td>4</td><td>+</td><td>-</td><td>-</td><td>+</td><td>CCW</td></tr></table>	CW	Step	A	B	A~	B~			1	+	+	-	-			2	-	+	+	-			3	-	-	+	+			4	+	-	-	+	CCW	Label Content 
CW			Step	A	B	A~	B~																															
			1	+	+	-	-																															
			2	-	+	+	-																															
	3	-	-	+	+																																	
	4	+	-	-	+	CCW																																
Revision Record																																						
初次发放																																						
签字The signature																																						
日期 Date	Note: The color and order of the motor leads are subject to the actual object.	Initial Direction: Follow the excitation sequence in the table, observing the clockwise direction from the mounting surface.																																				
2023.10.23																																						

客户签字确认					视图方式:		SM1102	
	标记	处数	更改文件号	签名	年月日		TWO-PHASE HYBRID STEPPER MOTOR	
设计			标准化			比例		
校核			工艺					
审核			批准					
图样标记	H							
					共 1 张	第 1 张		